PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner
US Department of Commerce
United States Patent and Trademark Office, PCT
2011 South Clark Place Room CP2/5C24
Arlington, VA 22202
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year)	
24 May 2001 (24.05.01)	
International application No.	**Applicant's or agent's file reference**
PCT/NL00/00590	BO 42838 As
International filing date (day/month/year)	**Priority date** (day/month/year)
24 August 2000 (24.08.00)	25 August 1999 (25.08.99)
Applicant	
BERVOETS, Alfonsus, Maria et al	

1. The designated Office is hereby notified of its election made:

[X] in the demand filed with the International Preliminary Examining Authority on:

12 March 2001 (12.03.01)

[] in a notice effecting later election filed with the International Bureau on:

2. The election [X] was

[] was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Zakaria EL KHODARY

Telephone No.: (41-22) 338.83.38

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	**FOR FURTHER ACTION** see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
BO 42838 As		
International application No.	International filing date *(day/month/year)*	(Earliest) Priority Date *(day/month/year)*
PCT/NL 00/ 00590	24/08/2000	25/08/1999
Applicant		
AMB -IT HOLDING B.V. et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

[X] It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**

 a. With regard to the **language,** the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

 [] the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

 b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

 [] contained in the international application in written form.

 [] filed together with the international application in computer readable form.

 [] furnished subsequently to this Authority in written form.

 [] furnished subsequently to this Authority in computer readble form.

 [] the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

 [] the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. [] **Certain claims were found unsearchable** (See Box I).

3. [] **Unity of invention is lacking** (see Box II).

4. With regard to the **title,**

 [X] the text is approved as submitted by the applicant.

 [] the text has been established by this Authority to read as follows:

5. With regard to the **abstract,**

 [X] the text is approved as submitted by the applicant.

 [] the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No. 1

 [] as suggested by the applicant.

 [X] because the applicant failed to suggest a figure.

 [] because this figure better characterizes the invention.

 [] None of the figures.

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL 00/00590

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01S5/06 G01S13/87

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01S G08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 790 052 A (GRABOW WILHELM) 4 August 1998 (1998-08-04) -AA abstract column 2, line 12 -column 3, line 61 figures	1,5,8
A	EP 0 715 185 A (HUGHES AIRCRAFT CO) 5 June 1996 (1996-06-05) -AF abstract column 2, line 33 -column 3, line 2 column 4, line 11 - line 24 column 6, line 7 - line 31	1
A	US 4 757 315 A (LICHTENBERG CHRISTOPHER L ET AL) 12 July 1988 (1988-07-12) -AB abstract column 15, line 22 -column 16, line 19	2-4

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
27 November 2000	04/12/2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Roost, J

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Application No
PCT/NL 00/00590

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 802 515 A (NIPPON ELECTRIC CO) 22 October 1997 (1997-10-22) -AE abstract column 7, line 57 -column 8, line 9	1,5
A	DE 28 43 253 A (STANDARD ELEKTRIK LORENZ AG) 17 April 1980 (1980-04-17) page 6, line 15 -page 8, line 24 -AG page 16, line 1 - line 11	1-4,8
A	US 5 621 411 A (HAGL ANDREAS ET AL) 15 April 1997 (1997-04-15) cited in the application -AC abstract	1
A	US 5 406 275 A (HASSETT JOHN J ET AL) 11 April 1995 (1995-04-11) cited in the application -AD abstract	1

2

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
NL 00/00590

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5790052	A	04-08-1998	DE	4439708 A	09-05-1996
			AT	168486 T	15-08-1998
			WO	9614626 A	17-05-1996
			DE	59502850 D	20-08-1998
			EP	0789898 A	20-08-1997
			HU	77162 A	02-03-1998
EP 0715185	A	05-06-1996	US	5648767 A	15-07-1997
			AU	673315 B	31-10-1996
			AU	3913195 A	06-06-1996
			BR	9505585 A	04-11-1997
			CA	2164031 A	31-05-1996
			JP	2677540 B	17-11-1997
			JP	8228167 A	03-09-1996
			KR	153594 B	15-12-1998
			NO	954851 A	31-05-1996
US 4757315	A	12-07-1988	NONE		
EP 0802515	A	22-10-1997	JP	2918024 B	12-07-1999
			JP	9282505 A	31-10-1997
			AU	713387 B	02-12-1999
			AU	1786997 A	23-10-1997
			CA	2202575 A	15-10-1997
			US	5969641 A	19-10-1999
DE 2843253	A	17-04-1980	NONE		
US 5621411	A	15-04-1997	EP	0667537 A	16-08-1995
			JP	8005731 A	12-01-1996
US 5406275	A	11-04-1995	US	5144553 A	01-09-1992
			AU	4539493 A	24-01-1994
			WO	9400830 A	06-01-1994
			US	5805082 A	08-09-1998
			US	5347274 A	13-09-1994
			AU	7901691 A	10-12-1991
			EP	0530271 A	10-03-1993
			JP	5508492 T	25-11-1993
			WO	9118354 A	28-11-1991
			US	5751973 A	12-05-1998

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
BO 42838 Ja		
International application No.	International filing date *(day/month/year)*	Priority date *(day/month/year)*
PCT/NL00/00590	24/08/2000	25/08/1999
International Patent Classification (IPC) or national classification and IPC G01S5/06		
Applicant AMB -IT HOLDING B.V. et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 4 sheets, including this cover sheet.

 ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

 These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

 - I ☒ Basis of the report
 - II ☐ Priority
 - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
 - IV ☐ Lack of unity of invention
 - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
 - VI ☐ Certain documents cited
 - VII ☐ Certain defects in the international application
 - VIII ☐ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
12/03/2001	02.05.2001
Name and mailing address of the international preliminary examining authority: European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Pierron, P Telephone No. +49 89 2399 2518

Form PCT/IPEA/409 (cover sheet) (January 1994)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/NL00/00590

I. Basis of the report

1. With regard to the **elements** of the international application *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17))*:
Description, pages:

1-9 as originally filed

Claims, No.:

1-8 as originally filed

Drawings, sheets:

1/2-2/2 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-8
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-8
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-8
	No:	Claims	

2. Citations and explanations
see separate sheet

The invention relates to a system for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner.

It differs from the prior art in US-A-5621411 in that said measuring station comprises:
-a first receiver for receiving said signal through said antenna means at the one measuring point and
-a second receiver for receiving said signal through said antenna means at the other measuring point,
-high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the outputsignal of the second receiver,
-evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

Consequently, claim 1 meet the requirement of article 33 (2) and 33 (3) PCT.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
1 March 2001 (01.03.2001)

PCT

(10) International Publication Number
WO 01/14905 A1

(51) International Patent Classification[7]: G01S 5/06, 13/87

(21) International Application Number: PCT/NL00/00590

(22) International Filing Date: 24 August 2000 (24.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1012907 25 August 1999 (25.08.1999) NL

(71) Applicant *(for all designated States except US)*: **AMB-IT HOLDING B.V.** [NL/NL]; Herenweg 29A, NL-2105 MB Heemstede (NL).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **BERVOETS, Alfonsus, Maria** [NL/NL]; Duindoornlaan 32, NL-2116 TL Bentveld (NL). **HIN, Franciscus, Robertus, Albertus, Cornelis** [NL/BE]; Jagerspad 3, B-3910 Neerpelt (BE).

(74) Agent: **JORRITSMA, Ruurd**; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR DETERMINING THE POSITION OF A TRANSPONDER

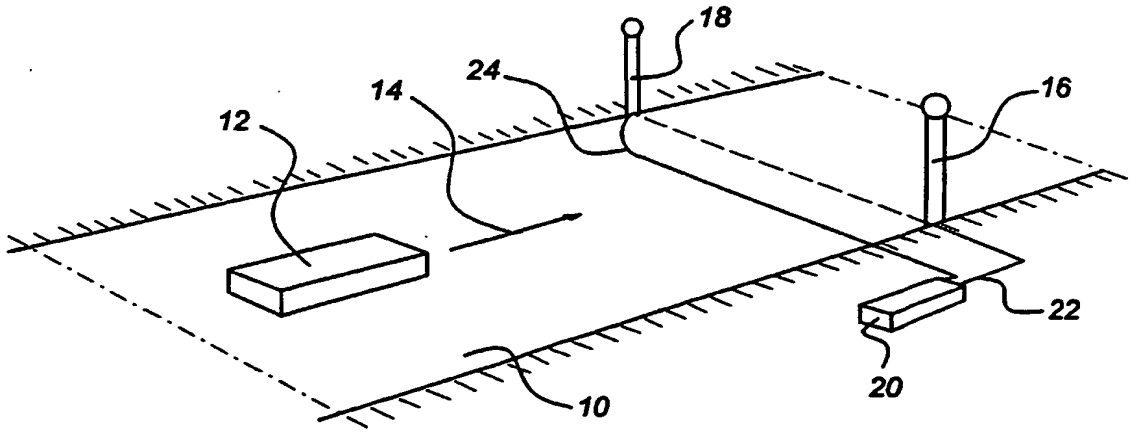

(57) Abstract: System for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner, whereby said measuring station comprises: a first receiver for receiving said signal through said antenna means at the one measuring point and a second receiver for receiving said signal through said antenna means at the other measuring point, high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the output signal of the second receiver, evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

WO 01/14905 A1

System for determining the position of a transponder

The invention relates to a system for determining the position of a transponder which moves along a course.

STATE OF THE ART

Such systems are known from the state of the art. In these systems in general the object is to determine the position in the direction of movement whereby field strength measurements are used. An example thereof is described in US5621411.

In certain cases it is desirable to know the position of the transponder in a direction transverse to the course. An example thereof are the toll-installations on multi lane auto-routes. Therewith it is important to make clear in which lane a vehicle is present before the necessary data are exchanged with said vehicle in relation to the toll charging. Charging toll from a vehicle in a neighbouring lane has to be prevented.

An example of means for determining in which lane a vehicle is present in the neighbourhood of a toll charging installation is described in US5406275. In this known system one detection station per lane is used whereby care has to be taken that each detection station almost exclusively detects its own lane and causes as less as possible disturbance in the neighbouring detection stations. In this publication also the above mentioned distance measurements by means of field strength measurements are described.

This prior art system is based on clearly distinguishable lanes and has per lane separate hardware necessary to perform the required measurements.

Another example of circumstances whereby it is often desirable to know the position of the transponder in a direction transverse to the course along which the transponder is moving is formed by auto races, races with karats, skelters, bicycles of other vehicles, horseraces, houndraces and all other races which take place on a specific course. Especially at those places which are not in view of an observer it might be important to know which contestant has the innerlane, the outerlane or moves on the middle of the road, etc.

OBJECT OF THE INVENTION

The object of the invention is now to determine the position of the transponder in transversal direction in relation to a course without the necessity to divide the course in transversal direction in clearly distinghuised and electromagnetically screened lanes which each should have its own measuring station.

BRIEF DESCRIPTION OF THE INVENTION

The above mentioned object is fulfilled by a system for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner, whereby said measuring station comprises:

- a first receiver for receiving said signal through said antenna means at the one measuring point and
- a second receiver for receiving said signal through said antenna means at the other measuring point,
- high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the outputsignal of the second receiver,
- evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

I case the transponder is moving exactly in the middle of the road then at both measuring points signal with equal phase will be received. If the transponder is present more to the left side of the course then a predetermined phase difference will be measured. If the transponder is moving more to the right side of the course then a predetermined opposite phase difference will be measured.

Depending on the applied frequency and the width of the course it is possible that a number of phase zeros will be measured spread over the length of the line segment between both measuring points. That makes it impossible for the evaluation unit to determine the position in an unambiguous manner.

There are a number of possibilities to eliminate this unambiguity. In the first place one could think of lowering the signal frequency. However, in general the applied frequencies are bounded to various national and international agreements which in

general prevent a variation of the signal frequency. However, applying a modulation is possible whereby a relatively low modulation frequency can be selected. In that case not the signal itself but the modulation frequency is used for the phase measuring.

A system which is embodied according to thios principle has the characteristic that the transponder transmits a modulated signal, that the first receiver is followed by a first demodulator for demodulating the received signal, that the second receiver is followed by a second demodulator for demodulating the received signal, and that low frequency phase measuring means measure the phase difference between the output signal of the first demodulator and the output signal of the second demodulator. In this system not the phase of the carrier wave but the phase of the modulating signal is measured of which the frequency is much lower and by means of which a line segment with a larger length (and therefore a course with a larger width) can be covered unambiguously without a number of zero phase measuring points.

A disadvantage of the above mentioned system may be that the accuracy of the location determination based on relatively low frequency modulation signal is lower than in case the higher frequency signals would be used. To solve said problem, it is preferred to combine both embodiments such that the evaluation means use the output signal of the low frequency phase measuring means for "coarse" position determination whereas the output signal of the high frequency phase measuring means is used for "fine" position determining.

In principle various types of modulation can be used, amplitude modulation, frequency modulation, phase modulation, etc. A type of modulation which needs only very simple circuits to obtain a properly functioning system is amplitude modulation whereby the modulation signal is a pulse series by means of which the amplitude of the carrier wave is modulated between 0% and 100%. In other words the transponder transmits signal trains.

Another possibility to remove the uncertainty as resulting from various zero crossings is reducing the line segment and apply a serious circuit of a number of smaller line segments. The length of each smaller line segment has to be such that within each line segment an unambiguous measurement can be performed. To be able to determine which line segment will supply the correct measuring value use can be made of a field strength measurement in each of the measuring points. The line seg-

ment which is bounded by those measuring points which together have the strongest sum signal is selected.

A system functioning according to this principle has the characteristic that between both ends of said line segment another N measuring points are realised such that the line segment is divided by N+2 measuring points into N+1 segments each having a length which is small enough to realise an unambiguous measurement within said segment, whereby the N+2 measuring points are connected to N+2 receivers, the output of each of said receivers is connected to a field strength measuring means, the output signals of all field strength measuring means are evaluated in a comparison circuit, which comparison circuit transfers the output signals of those two receivers having together the largest field strength, to a phase comparator to be mutually compared whereafter the resulting output signal of the phase comparator controls an evaluation unit.

Instead of field strength measurements a combination of carrier measurements and modulation signal measurements is conceivable. In that case the system comprises an first elongated loop antenna which is used for p-hase measurements of the modulation signals at the end points in the above described manner. The result thereof is a position with a relative low accuracy. The system comprises in that case a second antenna having a series circuit of small loop antennas which are used each for a phase measurement based on the carrier signal at the ends of each small loop antenna. Th position with low accuracy is used to select one of the small loup antennas. The phase measurement on this selected small loop antenna results into a position with a relatively high accuracy. A disadvantage of this embodiment is the rather complicated antenna system, necessary for performing the measurements.

A further preferred embodiment of the system has according to the invention the characteristic that the measurement is repeated a number of times in a row, whereafter the results are interpolated such that from the results the track can be derived which was followed by the transponder within said course.

INDICATION OF THE FIGURES

The invention will be explained in more detail hereinafter with reference to the attached drawings.

Figurc 1 illustrates schematically a perspective view on a part of a course, whereby at both sides of the course a receiving antenna of a measuring station is installed.

Figure 2 illustrates a top view on a measuring station with a loop shaped antenna on or in the surface of the course.

Figure 3 illustrates another embodiment of the electronics in the measuring station.

Figure 4 illustrates an embodiment whereby the modulation signal is used for "course" position determination and the high frequency carrier signal is used for "fine" position determination.

Figure 5 illustrates schematically an embodiment in which use is made of an antenna consisting of the series circuit of a number of loops.

Figure 6 illustrates schematically the exact route of a vehicle as function of a number of measurements performed by the system.

FIGURE DESCRIPTION

Figure 1 illustrates schematically a part of a course 10, e.g. part of a road, along which a transponder 12 is moving in the direction of the arrow 14. The transponder 12 will in a practical case be attached in or on an automobile, a motorbike or another vehicle, or to a human or animal, and will thereby be moved along the course 10 in the indicated direction.

At a number of places along the course measuring means are installed by means of which the position of the transponder 12 in transversal direction can be determined. In figure 1 such a measuring post is illustrated comprising an antenna 16 at one side of the road and an antenna 18 at the other side of the road, an electronics unit 20 which through a line 22 is connected to the antenna 16 and through a line 24 is connected to the antenna 18.

During operation the transponder 12 will transmit with short intermediate distances a signal which could be a continuous sinewave with predetermined frequency but could also be a modulated carrier wave. Preferably in the last mentioned case the carrier wave is modulated by a pulse series of significant lower frequency so that "signal trains" are formed.

For the coming part of this description it is assumed that the transponder transmits a continuous and preferably sinusoidal signal. This transmitted signal is received by both antennas 16 and 18. The received signals are transferred through lines 22 and 24 to the electronics units 20 in which the signals are phase compared with each other. If it is assumed furthermore that the signal lines 22 and 24 have the same length then it will be clear that, in case the transponder 12 is on the middle of the road, and the distance between the transponder 12 and the antenna 16 is identical to the distance between the transponder 12 and the antenna 18, both received signals in the electronics circuit 20 have the same phase. A phase difference 0 indicates therefore that the transponder 12 is in the middle of the road (or at least can be there). In case the transponder 12 is deviating from the middle of the road to the left then between both received signals a certain phase difference will be developed. If the transponder 12 deviates from the middle of the road into the right direction then in both received signals an opposite phase difference will be developed. If both lines 22 and 24 are not exactly of the same length then this will cause a fixed phase difference for which compensation can be provided as will be clear for the expert in this field. A similar note can be made by other embodiments of the system which will be described hereinafter.

A disadvantage of the schematically illustrated system in figure 1 is that this system can be realised in practice only for rather high carrier frequencies. Only then the dimensions of the antennas 16 and 18 will be such they are allowable in practice. Many of the momentarily used transponder applications, for instance for tracking vehicles along certain road sections, make use of much lower carrier frequencies. In that case it is preferred to use another antenna configuration as schematically illustrated in figure 2.

In figure 2 the course in top view is indicated in general by 30. In an imaginary coordinate system the direction of movement 14 of the transponder 12 equals the Y-direction. Transversal to this direction, in other words in the width direction of the course 30 the X-direction is assumed whereby in the example of figure 2 the lower side of the course overlaps X=0 whereas the upper side edge of the course overlaps X=B, whereby B is the width of the course 30. On the traject a loop shaped antenna 32 is installed comprising two long parallel conductors extending at short distance of each other which at X=0 and X=B are connected by short transversal conductors. The short transversal conductors are through the conduits 34 and 36 in connection with the elec-

tronic unit 38. In this electronic unit 38 two receivers 40 and 42 are positioned as well as a phase measuring unit 44 and an evaluation unit 46.

The signals measured at the ends of the loop antenna 32 are through lines 34 and 36 supplied to the receivers 40 and 42 and there amplified up to a desired level. The output signals of the receivers 40 and 42 are in a phase measuring unit 44 compared in phase with each other resulting into a phase output signal. This phase output signal is supplied to an evaluation unit 46 which derives an X-value from this phase signal. If the transponder is located exactly in the middle of the road then the unit 46 will provide a value X=B if the transponder is located more to the lower side of the road then the unit 46 will for instance provide the signal X=X1, whereby X1<½B, whereas if the transponder 12 is more located to the upperside the unit 46 can supply for instance a signal X =X2 whereby X2>½B is.

Dependent on the selected carrier wave frequency and dependent on the width B of the course it will happen that a number of 0 points are developing on the loup shaped antenna 32 so that the measurement is not unambiguous anymore. To provide a remedy it is for instance possible to make use of a modulated carrier wave instead of a continuous carrier wave whereby for the phase measurement not the carrier wave but the modulation signal with a much lower frequency is used. The electronics unit 38a is in that case extended by 2 demodulators in the way, as schematically is illustrated in figure 3. A first demodulator 48 is installed between the receiver 40 and the phase measuring unit 44 whereas a second demodulator 50 can be placed between the receiver 42 and the phase measuring unit 44. By adding these both demodulators 48 and 50 in the phase measuring unit 54 the phase difference between the modulation signals is measured. Because thereby signals with a very low frequency are involved it is now possible by a suitable selection of the frequency to reduce the number of zero points in the output signal of the unit 44 to only one. The evaluation unit 46 is able therewith to indicate unambiguously within the course X=0 and X=B where the transponder 12 is located.

A disadvantage of the use of relatively low frequency modulation signals can be that the therewith-obtained accuracy in the position determination is lower than in case the higher frequency carrier wave is applied. In the embodiment which is schematically illustrated in figure 4 the advantages of both embodiments are combined. The elongated loop antenna which is present in or on the course is in that case indicated by 70. The

ends of the antenna 70 are through lines 72 and 74 connected with the respective receiver 76 and 78. Each of the receivers supplies a high frequency modulated signal to one of the respective demodulators 80 and 82. The lower frequent modulation signals at the outputs of the demodulators 80 and 82 are supplied to the inputs of the phase comparator 84.

The high frequency output signals of the receivers can be compared directly with each other in the phase comparator 86. As indicated above this may lead to a non-unambiguous location determination. By combining the output signal of the phase comparator 84, by means of which the position is "coarse" indicated however not unambiguously, with the output signal of the phase comparator 86 it will be clear that within the "coarse" determination a "fine" tuning can be applied. The evaluation unit 88 therefore provides as a result a location determination with high accuracy.

Above one has assumed that the usual antenna is present in or on the surface of the road. That is however not necessary. The transponder can be embodied also as a vertical standing loop or window antenna. Also an antenna at a certain height above the road such, that the transponder can move underneath the antenna, can be applied.

Another possibility to eliminate the ambiguity in the outputsignal of the phase measuring unit 44 is illustrated in figure 5. Instead of an elongated loop shaped antenna 32 such as in figure 2 or figure 4 in this case use is made of a series circuit of a number of much shorter loop antennas 52a, 52b, 52c,...Each of these antennas is through an own line 54a, 54b, 54c.... connected to an own receiver 56a, 56b, 56c,... in the electronic unit 38c. The outputs of the various receivers are connected to a series of field strength meters 58a, 58b, 58c,.... which supply output signals to a comparison circuit 60. All these output signals together form a curve which indicates where, above which small antenna 52a, 52b, 52c,.... the transponder has to be found. The comparison circuit 60 in fact establishes which two adjacent receivers have the largest summing amplitude of the received signals and controls the series of switches of 62a, 62b, 62c, ... such that only the output signals of these two selected receivers are transferred to the phase measuring circuit 64. The outputsignal of the phase measurement circuit 64 is taken into account by the evaluation circuit 66 together with the positions of the switches 62a, 62b, 62c,...

Above it is assumed that the transponder is an active transponder which transmits signal trains with regular intervals without being activated thereto by an externally re-

ceived signal. The invention however can be applied wit good results in combination with passive transponders which become only active after reception of an activated signal and will transmit then a response signal.

Finally it is remarked that in the above description a line segment is assumed which is perpendicular to the track direction and which has its endpoints at the edges of the track. A line segment which is not ideally perpendicular but makes a small angle with the direction of the track such as caused by not accurately setting of the line segment can appear easily in practice and will in general not lead to a grave measuring error. Only if the angle is relatively large (larger than 10 degrees) then this angle should be taken into account in the evaluating means.

CLAIMS

1. System for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner, whereby said measuring station comprises:
- a first receiver for receiving said signal through said antenna means at the one measuring point and
- a second receiver for receiving said signal through said antenna means at the other measuring point,
- high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the outputsignal of the second receiver,
- evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

2. System according to claim 1, characterized in that the transponder transmits a modulated signal, that the first receiver is followed by a first demodulator for demodulating the received signal, that the second receiver is followed by a second demodulator for demodulating the received signal, and that low frequency phase measuring means measure the phase difference between the output signal of the first demodulator and the output signal of the second demodulator.

3. System according to claim 1 and 2, characterized in that the evaluation means use the output signal of the low frequency phase measuring means for "coarse" position determination whereas the output signal of the high frequency phase measuring means is used for "fine" position determining.

4. System according to one of the claims 2 or 3, characterized in that the modulated signal is obtained by amplitude modulation whereby the modulation signal is a pulse

series by means of which the amplitude of the carrier wave is modulated between 0% and 100%.

5. System according to claim 1, characterized in that between both ends of said line segment another N measuring points are realised such that the line segment is divided by N+2 measuring points into N+1 segments each having a length which is small enough to realise an unambiguous measurement within said segment, whereby the N+2 measuring points are connected to N+2 receivers, the output of each of said receivers is connected to a field strength measuring means, the output signals of all field strength measuring means are evaluated in a comparison circuit, which comparison circuit transfers the output signals of those two receivers having together the largest field strength, to a phase comparator to be mutually compared whereafter the resulting output signal of the phase comparator controls an evaluation unit.

6. System according to one of the preceding claims 1-4, characterized in that the system comprises an elongated loop antenna consisting of two parallel antenna conductors extending a short mutual distance and having a length equal to the length of said segment, which antenna conductors are connected at their ends where the measuring points are formed.

7. System according to claim 5, characterized in that the antenna is built as a series circuit of N+1 small loop antennas each comprising two parallel antenna conductors extending at short mutual distance of which the ends are interconnected, which loop antennas are in length direction coupled to each other.

8. System according to one of the preceding claims, characterized in that the measurement is repeated a number of times in a row, whereafter the results are interpolated such that from the results the track can be derived which was followed by the transponder within said course.

Fig 1

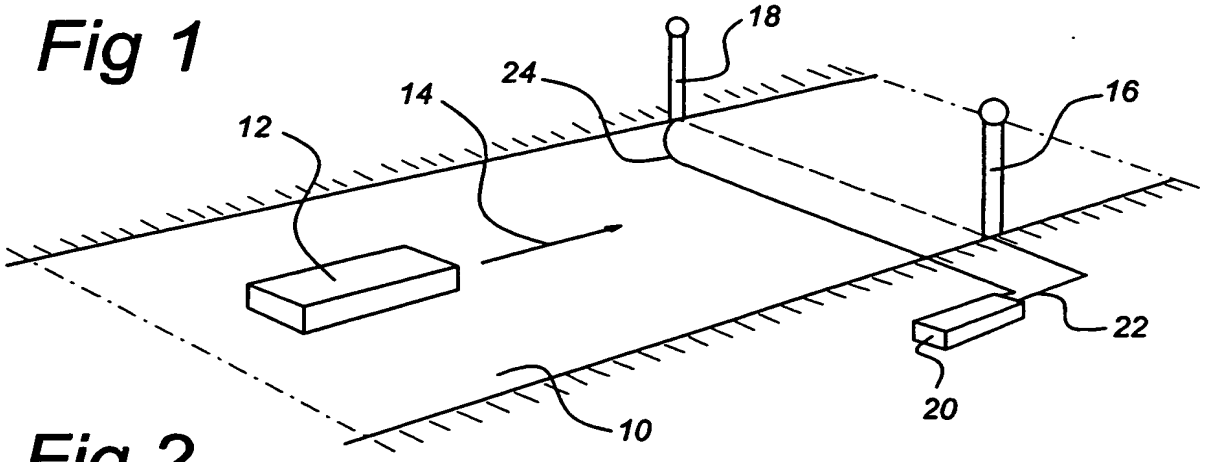


Fig 2

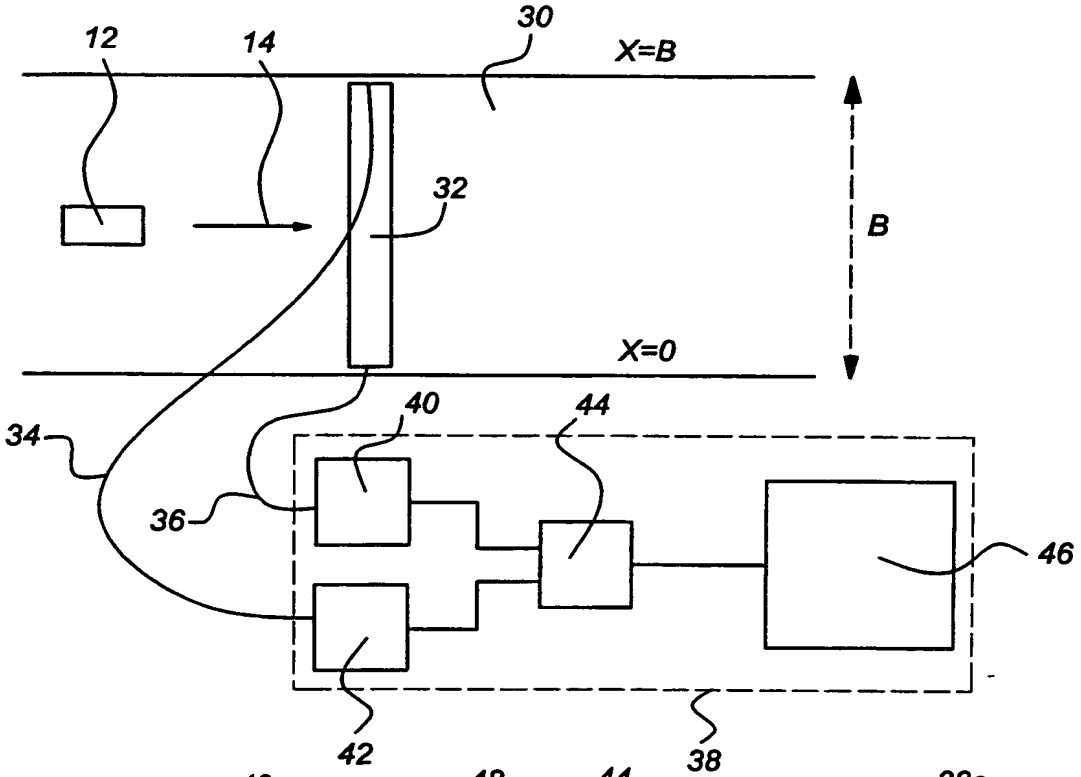


Fig 3

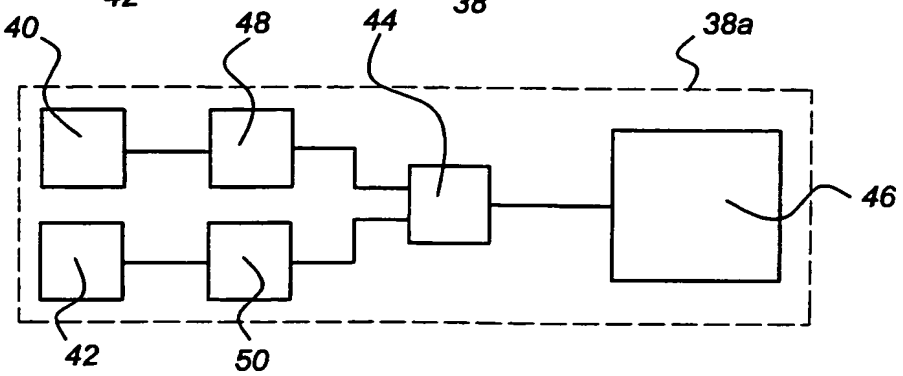


Fig 4

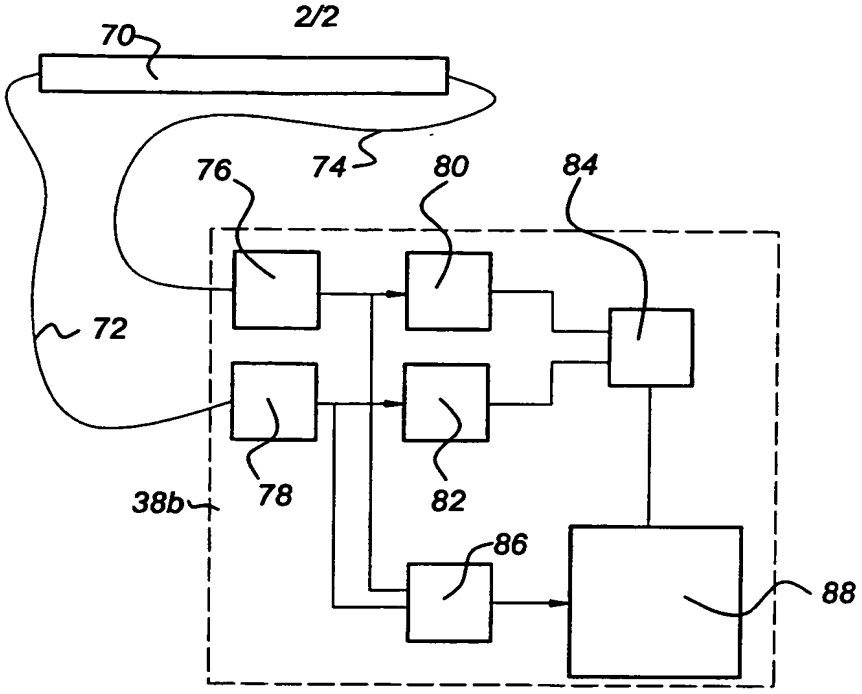


Fig 5


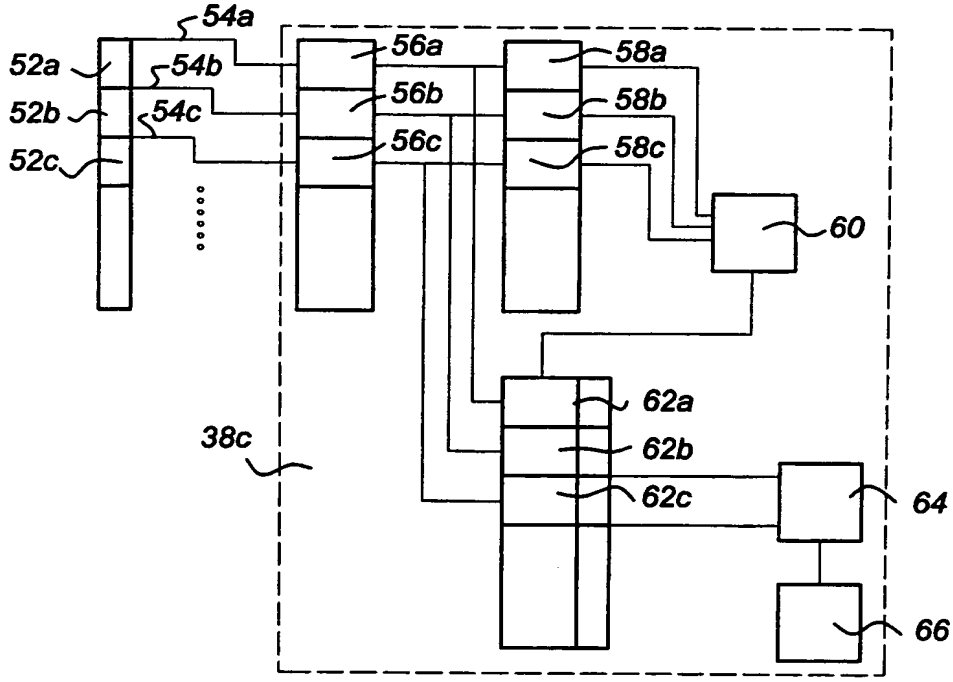


Fig 6

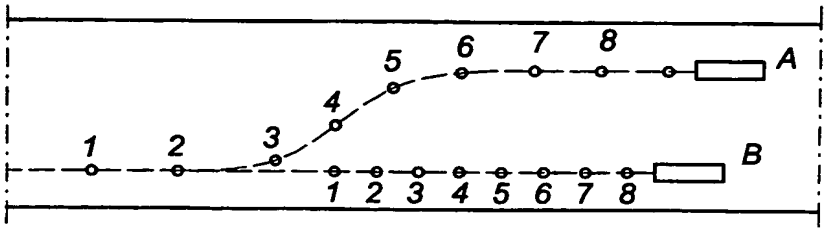

INTERNATIONAL SEARCH REPORT

Inte[redacted] Application No
PCT/NL 00/00590

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01S5/06 G01S13/87

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01S G08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 790 052 A (GRABOW WILHELM) 4 August 1998 (1998-08-04) abstract column 2, line 12 -column 3, line 61 figures	1,5,8
A	EP 0 715 185 A (HUGHES AIRCRAFT CO) 5 June 1996 (1996-06-05) abstract column 2, line 33 -column 3, line 2 column 4, line 11 - line 24 column 6, line 7 - line 31	1
A	US 4 757 315 A (LICHTENBERG CHRISTOPHER L ET AL) 12 July 1988 (1988-07-12) abstract column 15, line 22 -column 16, line 19	2-4

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
27 November 2000	04/12/2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Roost, J

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inte[redacted] Application No
PCT/NL 00/00590

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 802 515 A (NIPPON ELECTRIC CO) 22 October 1997 (1997-10-22) abstract column 7, line 57 -column 8, line 9 ---	1,5
A	DE 28 43 253 A (STANDARD ELEKTRIK LORENZ AG) 17 April 1980 (1980-04-17) page 6, line 15 -page 8, line 24 page 16, line 1 - line 11 ---	1-4,8
A	US 5 621 411 A (HAGL ANDREAS ET AL) 15 April 1997 (1997-04-15) cited in the application abstract ---	1
A	US 5 406 275 A (HASSETT JOHN J ET AL) 11 April 1995 (1995-04-11) cited in the application abstract -----	1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter[redacted] Application No
PCT/NL 00/00590

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5790052 A	04-08-1998	DE 4439708 A	09-05-1996
		AT 168486 T	15-08-1998
		WO 9614626 A	17-05-1996
		DE 59502850 D	20-08-1998
		EP 0789898 A	20-08-1997
		HU 77162 A	02-03-1998
EP 0715185 A	05-06-1996	US 5648767 A	15-07-1997
		AU 673315 B	31-10-1996
		AU 3913195 A	06-06-1996
		BR 9505585 A	04-11-1997
		CA 2164031 A	31-05-1996
		JP 2677540 B	17-11-1997
		JP 8228167 A	03-09-1996
		KR 153594 B	15-12-1998
		NO 954851 A	31-05-1996
US 4757315 A	12-07-1988	NONE	
EP 0802515 A	22-10-1997	JP 2918024 B	12-07-1999
		JP 9282505 A	31-10-1997
		AU 713387 B	02-12-1999
		AU 1786997 A	23-10-1997
		CA 2202575 A	15-10-1997
		US 5969641 A	19-10-1999
DE 2843253 A	17-04-1980	NONE	
US 5621411 A	15-04-1997	EP 0667537 A	16-08-1995
		JP 8005731 A	12-01-1996
US 5406275 A	11-04-1995	US 5144553 A	01-09-1992
		AU 4539493 A	24-01-1994
		WO 9400830 A	06-01-1994
		US 5805082 A	08-09-1998
		US 5347274 A	13-09-1994
		AU 7901691 A	10-12-1991
		EP 0530271 A	10-03-1993
		JP 5508492 T	25-11-1993
		WO 9118354 A	28-11-1991
		US 5751973 A	12-05-1998